
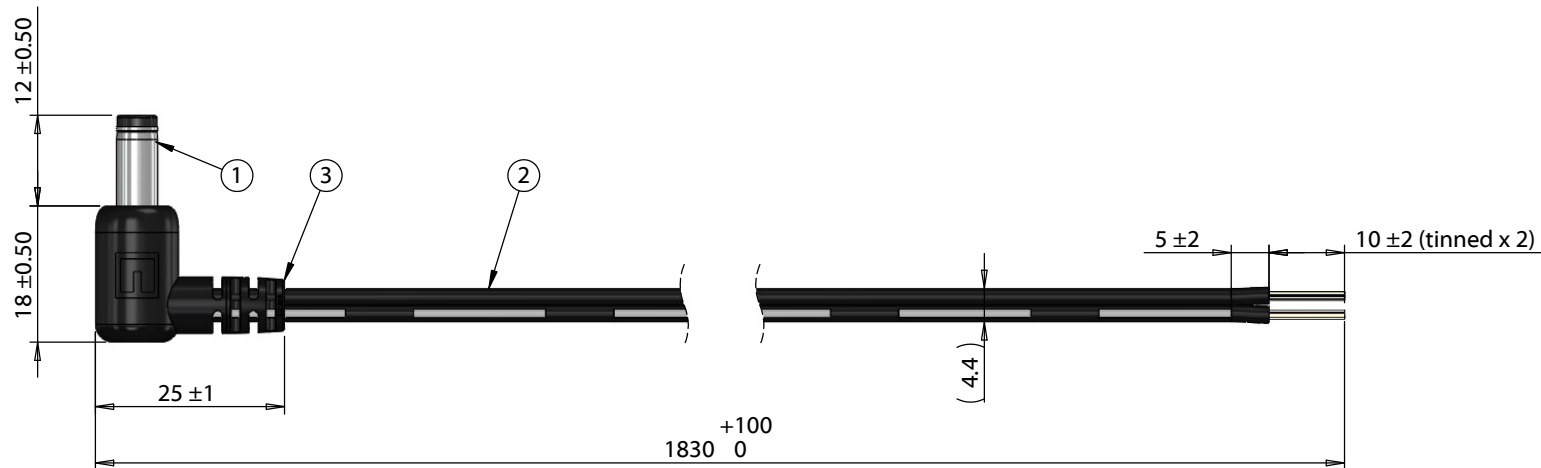


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|--------------------|
| 1 | 50-00540 | Connector, dc plug, 5.5x2.1x23 mm, molding style, spring contacts, nickel plated, 105° C | 1 | |
| 2 | 30-01248 | Wire, 2C, 18 AWG, UL4384, 300V, 105 °C, 4.4 mm, VW-1, LSZH, XLPE | 1 | |
| 3 | 24-00190 | Overmold, 90°, dc plug | 1 | TPE, 105 °C, black |



| Wiring Diagram | |
|----------------|-------------------|
| 50-00540 | wire color |
| center | black with stripe |
| sleeve | black |

| | | | | | |
|------------|------------|-----------------------|---|--|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 10/03/2018 | Initial release | Verified: | RoHS compliant | |
| | | | Dimensions are in millimeters. | Function test: no open, no short circuit, no intermittent | |
| | | | Tolerances: | Low smoke, zero halogen | |
| | | | X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 5.5x2.1x10 mm 90° 50-00540 dc plug to 10 mm tinned, 18 AWG, 30-01248, LSZH | |
| Scale: 1:1 | | Part number: 10-03132 | | Sheet 1 of 1 | |

5

4

3

2

1